

NEARSHORE PROCESSES

Brad Johnson Spicer Bak Nick Cohn Pat Dickhudt Kate Brodie

District PDT Members Jason Engle, Kevin Hodgins

COASTAL INLETS RESEARCH PROGRAM

FY21 IN PROGRESS REVIEW

Tiffany Burroughs

HQ Navigation Business Line Manager

Eddie Wiggins Technical Director, Navigation Morgan Johnston

Acting Associate Technical Director, Navigation



COASTAL & HYDRAULICS LABORATORY

UNCLASSIFIED





US Army Corps of Engineers®

Problem Statement:

Coastal sediment transport remains poorly understood. No comprehensive and general predictive technology exists for rational design and planning of coastal planform evolution of time scales of relevance for USACE project design and implementation.

USACE missions this work benefits:

- Beach Nourishment and Nearshore Placement
- Navigation and Safety
- Flood Risk Management & Coastal Hazards
- CERB and CWG initiative
- 2020-1536/1538 Optical Current Measurements; Nearshore Processes Research and Development (N,F,E)
- 2019-N-05 Strategic Nearshore Placement of Dredged Material to Sustain Coastal Beach Dune Resilience













US Army Corps of Engineers • Engineer Research and Development Center • Coastal and Hydraulics Laboratory

Capability and Strategic Impact Statement

- GOAL: A general transport model that predicts from storm scale to longer term evolution, appropriate from DOC to dunes.
- Nearshore placement: Sound practice leaves high quality dredged material in the littoral zone, nearshore placement may be more economical, no model adequately predicts morphology change of placement
- Storm protection: Dunes are routinely built for storm protection. Design is based on inertia or on models that are inappropriate

US Army Corps of Engineers • Engineer Research and Development Center • Coastal and Hydraulics Laboratory



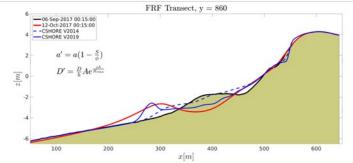

Measured Data to Advance Predictive Technology

- To develop reliable predictive numerical modeling technology with skill and generality.
- A coherent view of the relevant physics must first emerge from observations. First principles model is not realistic.
- A practical numerical model is dependent on high-quality data for comparison and justification of empirical devices.
- FRF data provides new model/data comparisons for waves, currents, morpho change
- Now using high-quality data from Agate Beach, OR
- Still dependent on laboratory for detailed sediment data

Modeling Longshore Currents

- Data provides a justification for the simplifications
- Bottom shear stress is comprised of surface shear and wave stress
- Wave stress a cosh squared profile
- Depth-invariant eddy viscosity
- Expression is 'nearly' quadratic

$$V = V_b + \frac{\tau_b}{\rho\nu_t} z' - \frac{D_B \sin \alpha}{\rho\nu_t c \left(\sinh 2kh + 2kh\right)} \left(kz'^2 + \frac{\cosh 2kz' - 1}{2k}\right)$$

US Army Corps of Engineers • Engineer Research and Development Center • Coastal and Hydraulics Laboratory


Modeling Cross Shore Currents

- The exact same approach used in LS is not possible in crossshore (owing to the pressure part of the wave stress)
- If we assume that wave stresses(?) and eddy viscosity(ok) are depth-invariant, then appropriately described by quadratic in the vertical
- 3 conditions, stress on bottom, stress on top, Mass flux:

$$U = \left(\frac{Q_x}{h} - \frac{\tau_{bx}h}{2\rho\nu_t} - \frac{\tau_{sx} - \tau_{bx}h}{6\rho\nu_t}\right) + \left(\frac{\tau_{bx}}{\rho\nu_t}\right)z' + \left(\frac{\tau_{sx} - \tau_{bx}}{2h\rho\nu_t}\right)z'^2$$


US Army Corps of Engineers • Engineer Research and Development Center • Coastal and Hydraulics Laboratory

Modeling Nearshore Currents

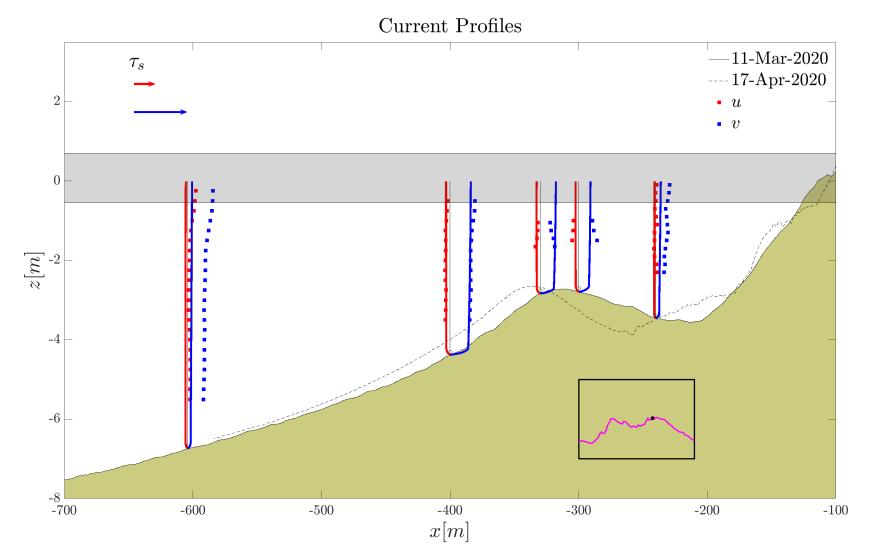

US Army Corps of Engineers • Engineer Research and Development Center • Coastal and Hydraulics Laboratory

Modeling Nearshore Currents

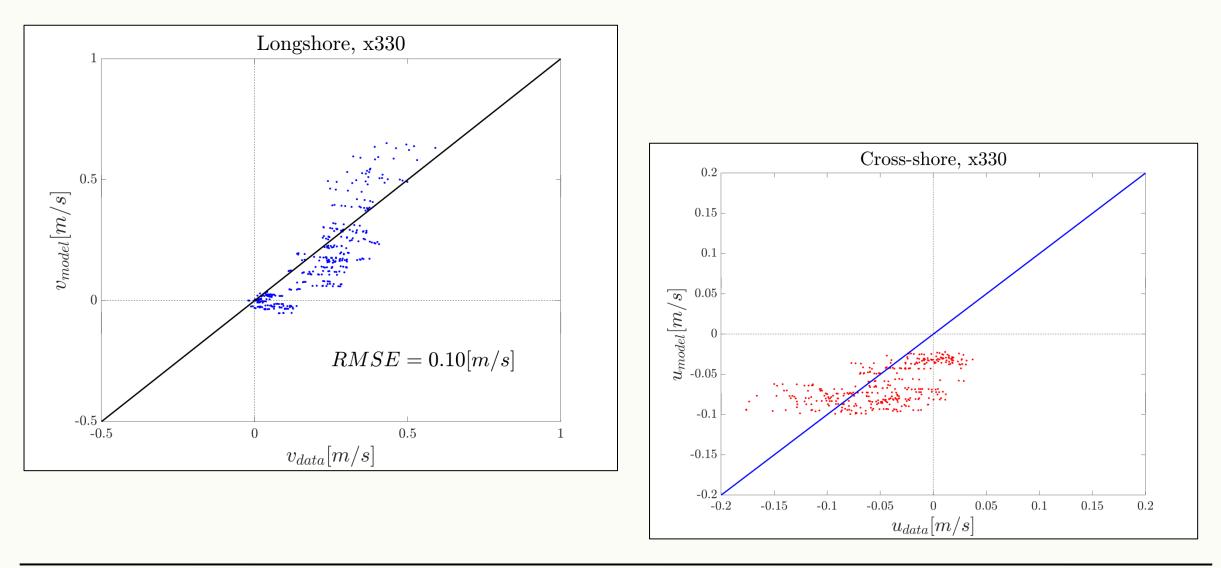

US Army Corps of Engineers • Engineer Research and Development Center • Coastal and Hydraulics Laboratory

Modeling Suspended Sediment


- Depth-dependent currents provides the opportunity to move towards process-based models
- Requires depth-dependent sediment profiles.

$$c = c_0 e^{-k_s z} \qquad k_s = \frac{w_0}{\nu_s}$$

- Tantamount to fall velocity matched by upward gradient diffusion
- Near-bed concentrations are related to turbulent dissipation (a modified CSHORE method)
- Simple analytic expressions permit the corrected transport at no computational expense


$$\int_{0}^{h} cUdz = \frac{c_{0}A_{0}}{k_{s}} \left(1 - e^{-k_{s}h}\right) + \frac{c_{0}A_{1}}{k_{s}^{2}} \left(1 - e^{-k_{s}h}(k_{s}h + 1)\right) + \frac{c_{0}A_{2}}{k_{s}^{3}} \left(e^{-k_{s}h}\left(-k_{s}h(k_{s}h + 2) - 2\right) + 2\right)$$

FRF Data and Domain

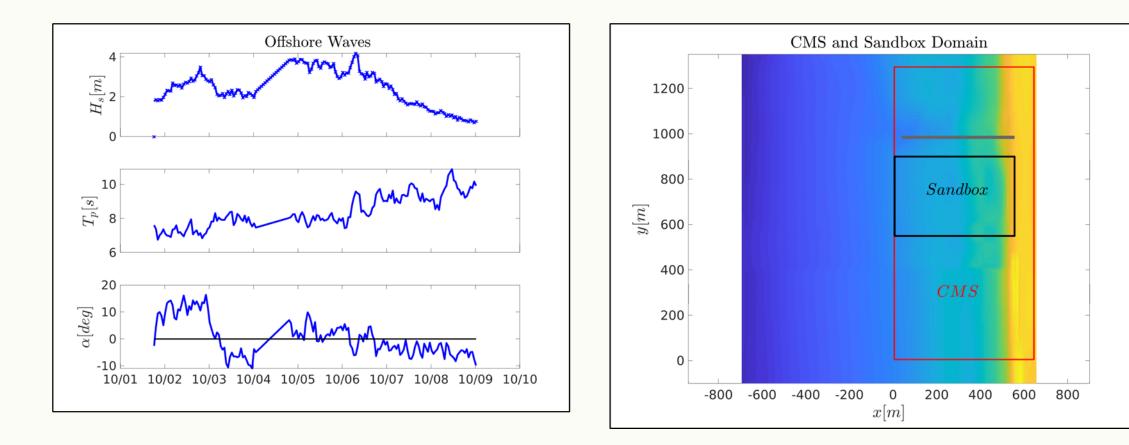


US Army Corps of Engineers • Engineer Research and Development Center • Coastal and Hydraulics Laboratory

FRF Nearshore Waves

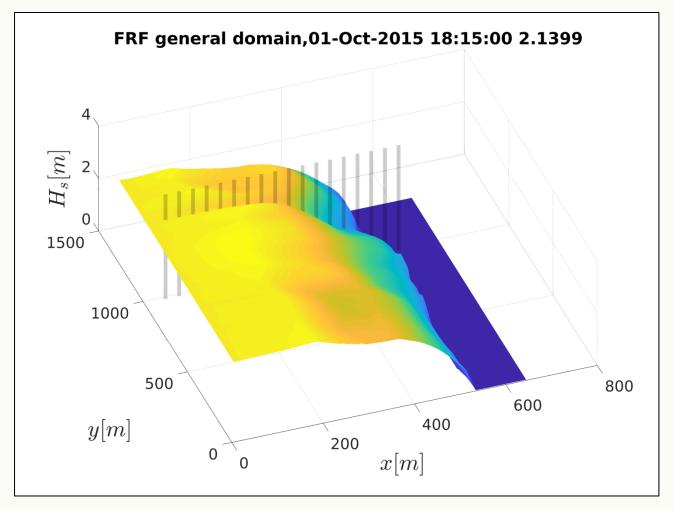

US Army Corps of Engineers • Engineer Research and Development Center • Coastal and Hydraulics Laboratory

FRF Nearshore Morphology Change

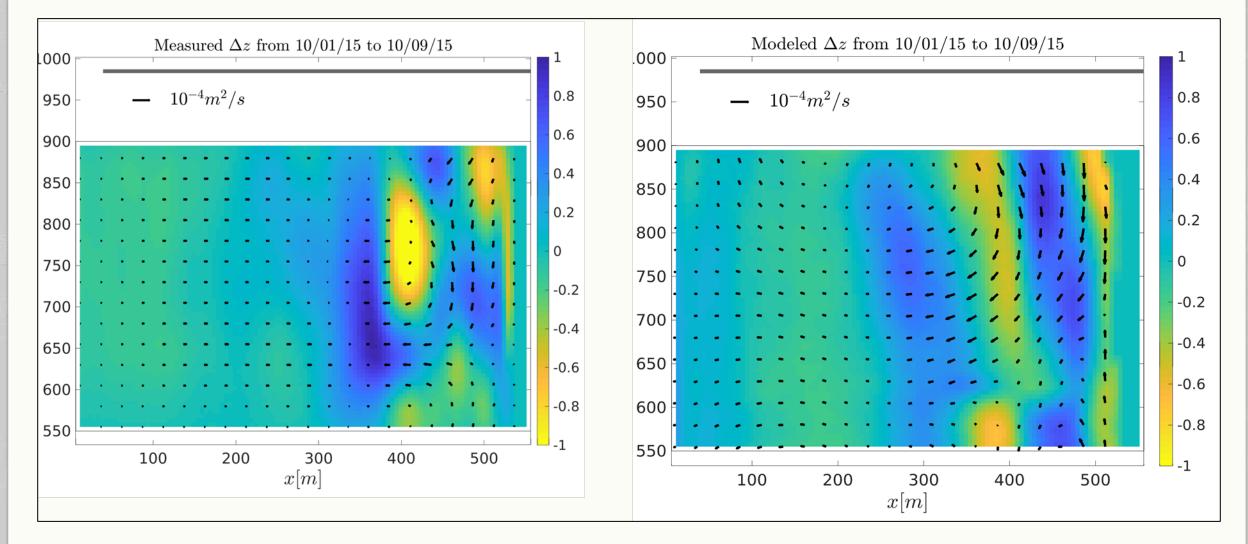

US Army Corps of Engineers • Engineer Research and Development Center • Coastal and Hydraulics Laboratory

Summary

FY21 Major Advances in Capability

- Some major bug fixes in both CMS/C2SHORE
- New depth-dependence is advance towards reality.
- Comprehensive comparison of FRF
 morphology change with models
- Encouraging coastal morphology change predictions

FY21 Major Products & Collaborations

- New CMS code (several branches in GIT) with C2SHORE settling in to stable version
- Two CIRP TD, CWG presentation, Coastal Dynamics Talk/JP
- WHOI, U Delaware, Scripps
- Leveraging with CODS, F&C

FY22 Products/Advances

- Further CSHORE Family model development.
- Integration of swash domain into surf domain, including morphology